

## Preizkusni način

Monterji ali električarji imajo preizkusni način za osnovno funkcijo: odpiranje vrat lahko izvedejo tako, da na čitalnik prstnih odtisov položijo poljubni prst. Preizkusni način je na voljo samo v prvih 10 minutah po vklopu. Po preteku tega časa ali po zagonu sistema se ta funkcija deaktivira.

## Zagon čitalnika prstnih odtisov ekey

Za zagon sistema potrebujete aplikacijo >ekey bionyx<. Ta vas bo intuitivno vodila skozi celoten postopek zagona.

### Aplikacija ekey bionyx



Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. Google Play and the Google Play logo are trademarks of Google LLC.

### Več podrobnosti najdete tukaj:



## Predpogoj za zagon

Obvezno je stabilno, z geslom zaščiteno 2,4-GHz omrežje WLAN s šifriranjem WPA-PSK2 z dosegom do vhodnih vrat.

Zagon lahko opravite tudi prek dostopne točke na svoji mobilni napravi. Navodila za nastavitve dostopne točke najdete v navodilu za upravljanje za mobilno napravo.

## Potrebujete podporo? Naš oddelek za tehnično podporo vam je na voljo!

### Avstrija in mednarodno

Od ponedeljka do četrтка: 8.00–17.00  
Petek: 8.00–13.00  
T: +43 732 890 500 - 0  
E: support@ekey.net

### Nemčija

Od ponedeljka do četrтка: 8.00–17.00  
Petek: 8.00–13.00  
T: +49 6187 906 96 - 0  
E: support@ekey.net

### Vzhodna jadranska regija

Od ponedeljka do četrтка: 8.00–16.00  
Petek: 8.00–12.00  
T: +386 1 530 94 95  
E: info@ekey.si

### Švica in Liechtenstein

Od ponedeljka do četrтка: 8.00–11.45,  
13.45–17.00  
Petek: 8.00–11.45  
T: +41 71 560 54 84  
E: supportschweiz@ekey.net


### Italija

Od ponedeljka do petka: 09:00–12:00, 14:00–  
17:00  
T: +39 0471 922 712  
E: italia@ekey.net


# Wiring diagram ekey dLine/KFV Genius A



ID364/753/0/714: Version 1, 2021-01-25

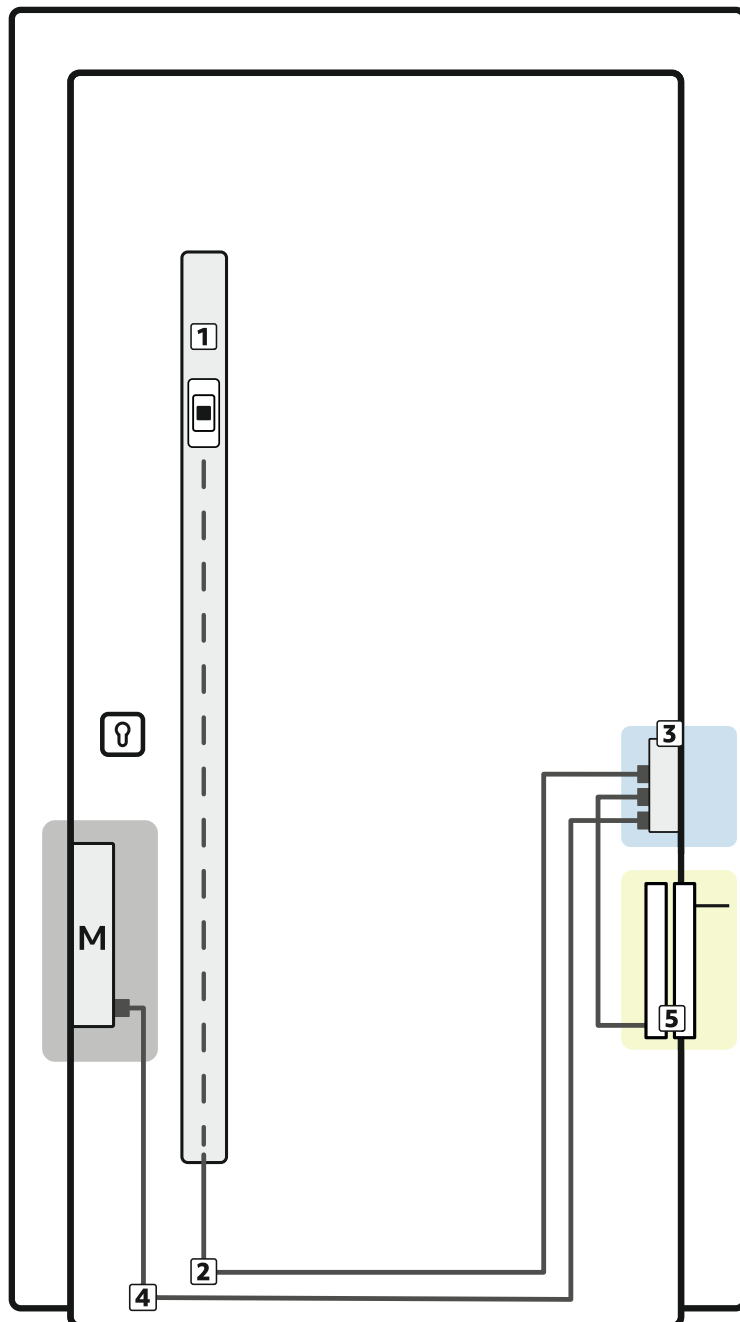


## Connection to the motorized lock



Pin	Color	Description
2	white	VDC (+)
3	brown	GND (-)
4	green	Switching impulse (+)


## Connection to the control unit



Pin	Color	Description
4	-	-
3	green	Switching impulse (+)
2	brown	GND (-)
1	white	VDC (+)

## Connection to the electrical installation

Color	Description
white	VDC (+) (24)
brown	GND (-)
green	ekey bus
yellow	ekey bus
blue	Input
gray	Input
pink	For testing purposes
red	For testing purposes



Potential-free request-to-exit button for manual door opening

⚠ Each unused core must be insulated separately! ⚠

### ⚠ DANGER

**Risk of electrocution:** All ekey devices are to be operated with Safety Extra Low Voltage (SELV). Only use power supplies rated protection class 2 with safety approval according to EN 62368-1.

Failure to do so will create a risk of fatal electrocution. Only certified electricians are authorized to carry out electrical installation work on mains systems.

### ⚠ ATTENTION

**Property damage in the event of incorrect mounting and wiring:** The system devices are operated using electricity. They could be destroyed if they are mounted and wired incorrectly. Mount and wire the system devices correctly before connecting the power.

### 📄 NOTICE

This wiring diagram is not subject to updating. We reserve the right to make technical modifications and change the product's appearance; any liability for errors and misprints is excluded.

- 1 ekey dLine fingerprint 450007
- 2 ekey dLine cable FP
- 3 ekey dLine controller 450008
- 4 ekey dLine cable MT
- 5 ekey dLine cable transfer 48 cm 2,5 m 201401